

HC series Manual Hydraulic Pallet Truck


Conventional models (2.0 T / 2 T / 5 T)



Customized fork length
Good overall sealing, long service life



Manual hydraulic
Suitable for multiple scenarios, facilitating transportation

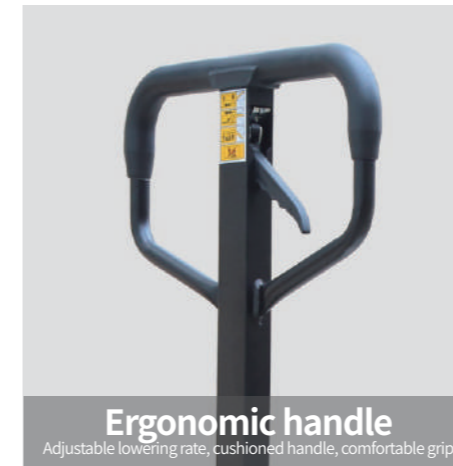

Ergonomic handle
Adjustable lowering rate, cushioned handle, comfortable grip





Sealed and durable hydraulic cylinder
Upgraded and premium quality




High quality and durable casters
Excellent wear resistance, strong load-bearing capacity

Item/Model	Unit	HC1-20	HC2-20	HC1-25	HC2-25	HC1-30	HC2-30
Rated loading capacity	kg	2000	2000	2500	2500	3000	3000
Dimensions	/	550 x1150	685 x1220	550 x1150	685 x1220	550 x1150	685 x1220
Fork lowered	mm	75	75	75	75	75	75
Outside fork width	mm	550	685	550	685	550	685
Fork length	mm	1150	1220	1150	1220	1150	1220
Single fork dimensions (CxE)	mm	160 X 50	160 X 50	160 X 50	160 X 50	160 X 50	160 X 50
Rated lifting height	mm	115	115	115	115	115	115
Overall length	mm	1550	1620	1550	1620	1550	1620
Overall width	mm	550	685	550	685	550	685
Overall height	mm	1210	1210	1210	1210	1210	1210
Handle style	/	Rubber coated handle	Rubber coated handle	Rubber coated handle	Rubber coated handle	Rubber coated handle	Rubber coated handle
Wheel type	/	Polyurethane/Nylon	Polyurethane/Nylon	Polyurethane/Nylon	Polyurethane/Nylon	Polyurethane/Nylon	Polyurethane/Nylon
Big steering wheel dimensions	mm	φ180 X 50	φ180 X 50	φ180 X 50	φ180 X 50	φ180 X 50	φ180 X 50
Small load bearing wheel dimensions (Dual-wheel)	mm	φ74 X 70	φ74 X 70	φ74 X 70	φ74 X 70	φ74 X 70	φ74 X 70
Service weight	kg	70	75	70	75	75	80
Customized fork length	mm	/	/	700-2000		700- 1800	

Fork specifications selection>>

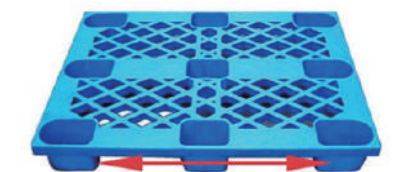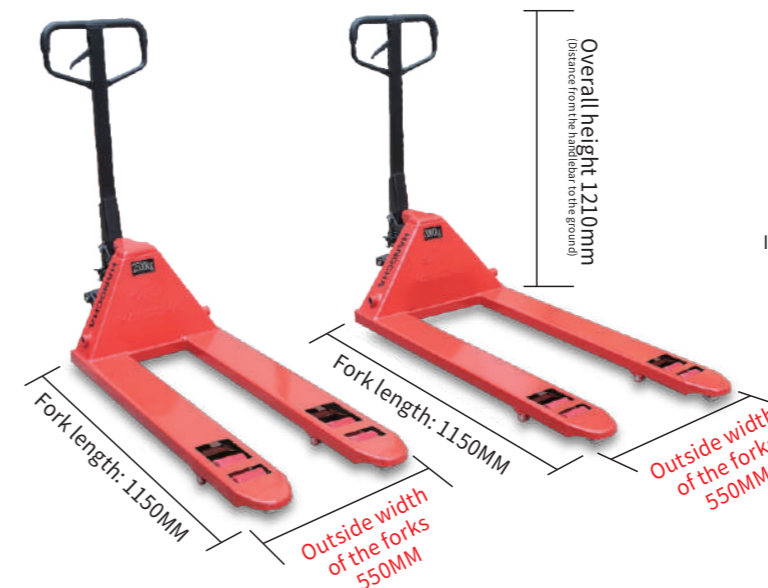

If the distance between pallet positions is **greater than 700mm**, choose Outside width **685** specification

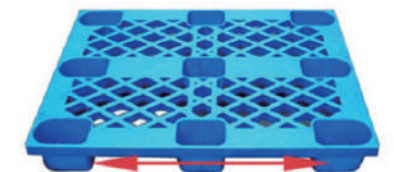

If the distance between pallet positions is **less than 700mm**, choose Outside width **550** specification