

HC series Manual Hydraulic Pallet Truck

Stainless steel models (2 T, 5 T)

No deformation under heavy load

Integrated forks

Rust-proof and corrosion-resistant




Item/Model	Unit	HC1-SS	HC2-SS	HC1-SS	HC2-SS
Rated loading capacity	kg	2500	2500	3000	3000
Dimensions	/	550 X 1150	685 X 1220	550 X 1150	685 X 1220
Fork lowered	mm	75	75	75	75
Outside fork width	mm	550	685	550	685
Fork length	mm	1150	1220	1150	1220
Single fork dimensions (CxL)	mm	160 X 50	160 X 50	160 X 50	160 X 50
Rated lifting height	mm	110	110	110	110
Overall length	mm	1550	1620	1550	1620
Overall width	mm	550	685	550	685
Overall height	mm	1210	1210	1210	1210
Handle style	/	Rubber coated handle	Rubber coated handle	Rubber coated handle	Rubber coated handle
Wheel type	/	Nylon	Nylon	Nylon	Nylon
Big steering wheel dimensions	mm	φ180 X 50	φ180 X 50	φ180 X 50	φ180 X 50
Small load bearing wheel dimensions (Dual-wheel)	mm	φ74 X 70	φ74 X 70	φ74 X 70	φ74 X 70
Service weight	kg	70	75	75	80




Integrated casting cylinder
Good sealing, safe and no oil leakage, stable performance



Thickened stainless steel
Rust-proof, corrosion-resistant, durable and resistant to wear

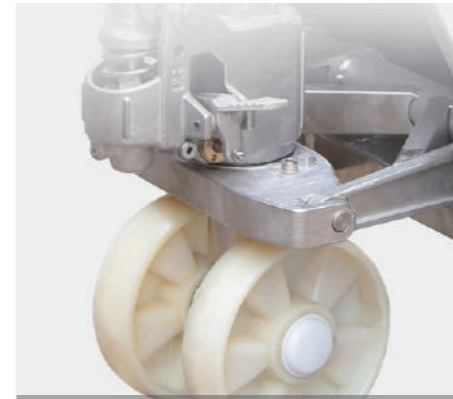

Wear-resistant nylon wheels
Low operating resistance, easy pulling, and corrosion resistance

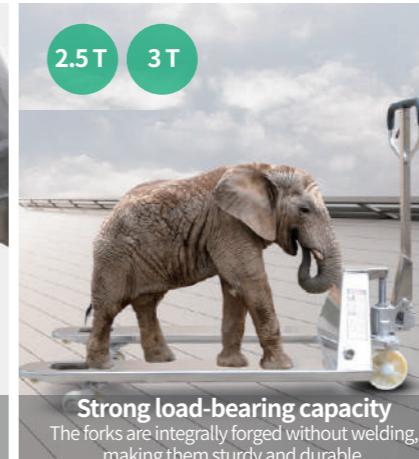


2.5 T 3 T


Strong load-bearing capacity
The forks are integrally forged without welding, making them sturdy and durable.




Integrated forks
The forks are integrally forged, making them sturdy and durable

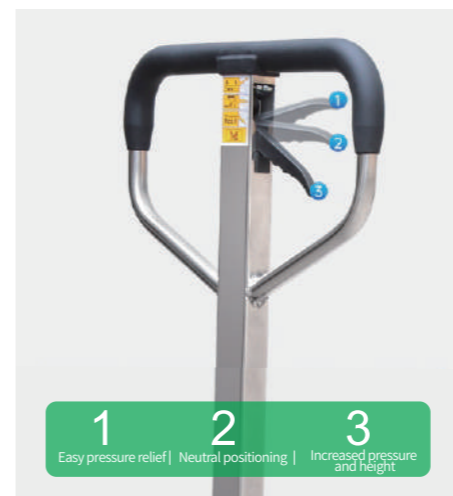

Lightweight upgraded rubber-coated handle
Manual pressure release + foot-operated pressure release

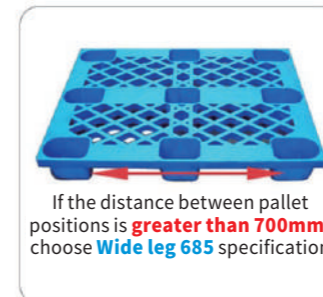

If the distance between pallet positions is **greater than 700mm**, choose **Wide leg 685** specification

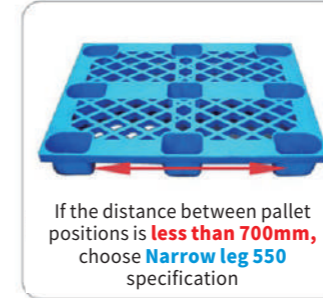

If the distance between pallet positions is **less than 700mm**, choose **Narrow leg 550** specification



Wide leg 1220mm
Narrow leg 1150mm

Wide leg 685mm
Narrow leg 550mm