

HCE series Manual Hydraulic Truck



Thickened steel plate



Easy handling



Low weight



Stable when pushed or pulled




Safety and reliability



Self-locking eagle beak



Item/Model	Unit	HCL
Rated loading capacity	kg	350
Max. diameter of oil drum	mm	600
Min. height of oil drum	mm	895
Front wheel dimensions	mm	φ180 X 50
Steering wheel dimensions	mm	φ125 X 38
Overall length	mm	800
Overall width	mm	790
Overall height	mm	1150
Service weight	kg	45

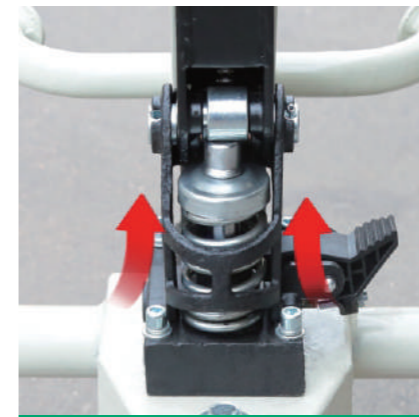


Thickened hydraulic springs

Strong hydraulic lifting performance, rapid and stable rebound; hydraulic lifting, safer and more convenient



Lightweight and convenient, easy handling

Small size, many uses, suitable for a variety of situations

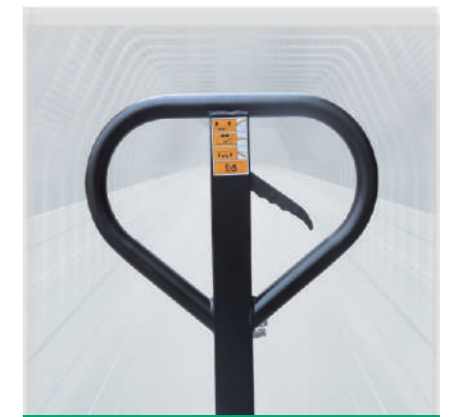

Hydraulic handle is comfortable to hold

Comfortable to use, easy to pull, stable lifting and lowering speed, manoeuvrable



Clamps firmly and does not release easily

Buckling and self-locking eagle beak grips tightly and is durable with good wear resistance



Casters with brake devices

High quality durable casters, suitable for various operating environments, making pushing easier; equipped with brake devices for safer transportation



High quality polyurethane wheel

Wheel body with dual sealed independent bearings, providing smooth rolling and good durability



Stable load-bearing



Stable structure



Rust resistant



Carefully selected high-quality thickened steel

Reinforced load-bearing mechanical arm welding, not easily deformed

Hydraulic handle

Reinforced spring

Polyurethane casters

Eagle beak clamp

Curved barrel holder