



HCP series Semi-electric Pallet Truck



Copper core motor
Low energy consumption, high power, low noise

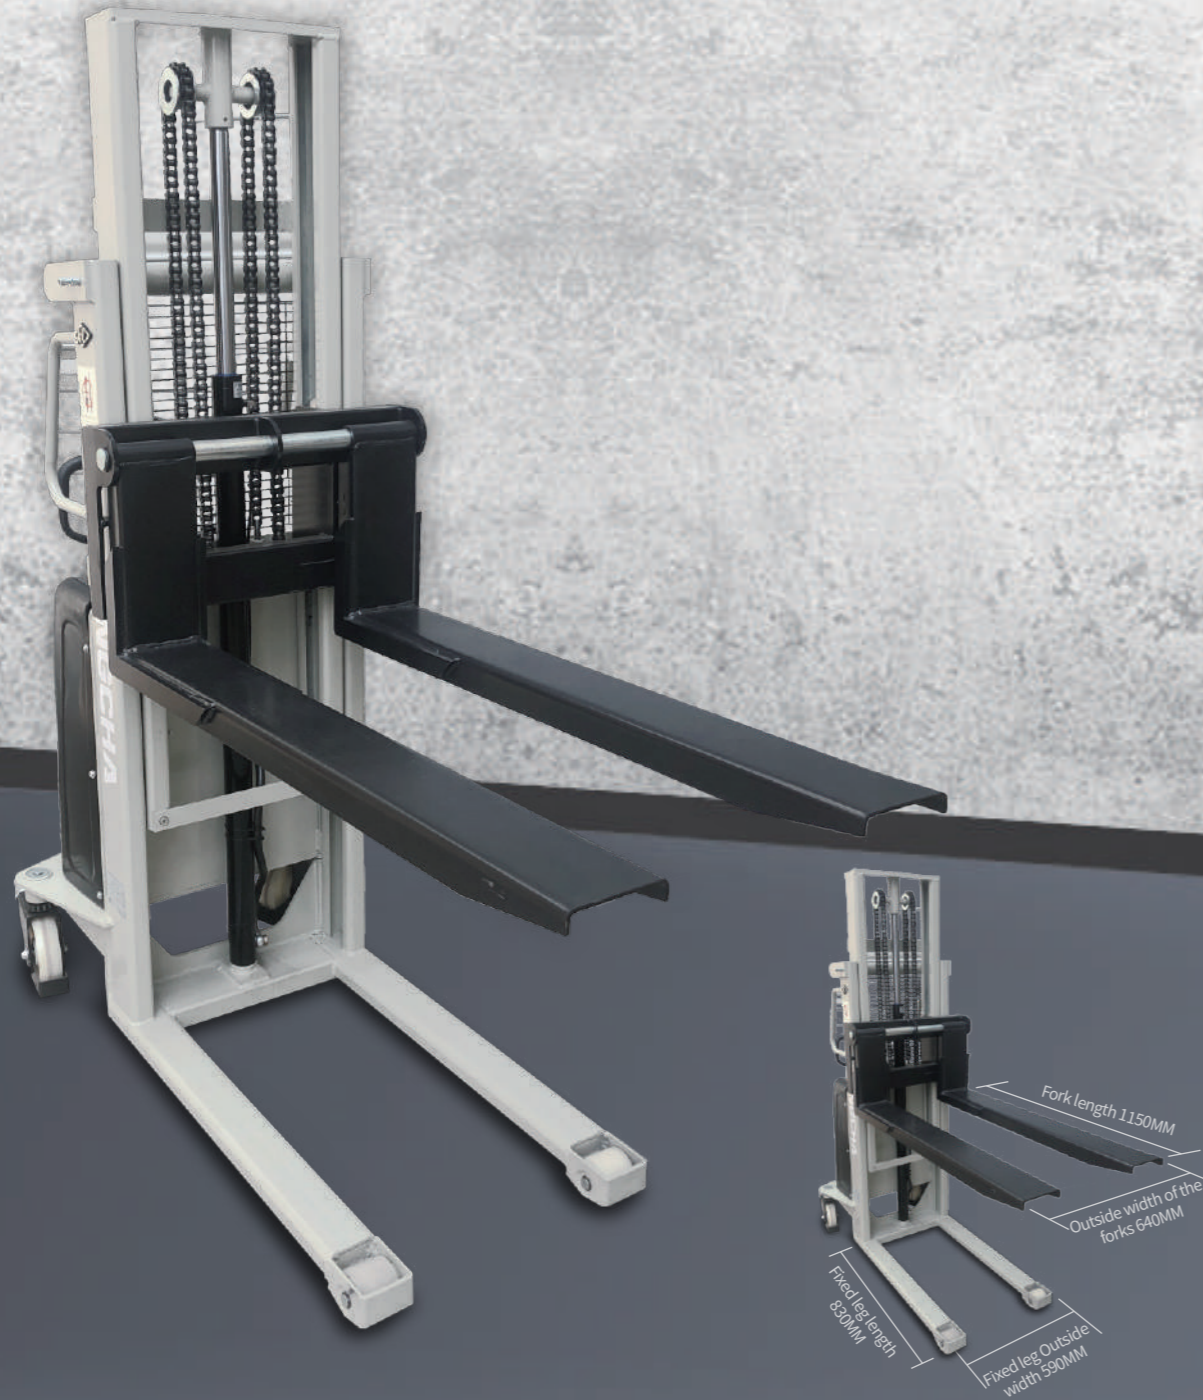

Multi-functional and simple operating platform
All control functions integrated for more user-friendly operation

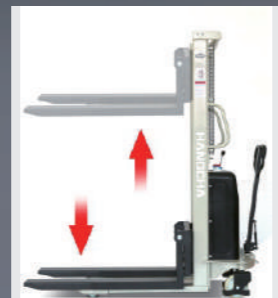

Fork free lifting
Fork free lifting adjustment



Safety brake function
Effectively and safely prevents the vehicle from sliding during unloading or due to terrain.

Item/Model	Unit	Simplex mast model		
		HCP1016	HCP1516	HCP2016
Rated loading capacity	kg	1000	1500	2000
Max. lifting height	mm	1600	1600	1600
Fork lowered	mm	85	85	85
Outside fork width	mm	640	640	640
Fork length	mm	1150	1150	1150
Single fork dimensions (CxEx)	mm	150 X 60	150 X 60	150 X 60
Outside width of fixed leg	mm	590	590	590
Single fixed leg dimensions	mm	100 X 50	100 X 50	100 X 50
Rated load capacity at the highest point	mm	1000	1200	1500
Vehicle static height from the highest point	mm	2080	2080	2080
Overall length	mm	1800	1800	1800
Overall width	mm	800	800	800
Overall height	mm	2080	2080	2080
Small front wheel dimensions	mm	φ74 X 70	φ74 X 70	φ74 X 70
Big rear wheel dimensions	mm	φ180 X 50	φ180 X 50	φ180 X 50
Power unit	V/Kw	12/1.6	12/1.6	12/1.6
Charger	V/A	12/15	12/15	12/15
Battery	V/Ah	12/120	12/120	12/120
Service weight	kg	360	370	380

Simplex mast model



Duplex mast model



Item/Model	Unit	Duplex mast model								
		HCP1020	HCP1025	HCP1030	HCP1035	HCP1520	HCP1525	HCP1530	HCP1535	HCP2020
Rated loading capacity	kg	1000	1000	1000	1000	1500	1500	1500	1500	2000
Max. lifting height	mm	2000	2500	3000	3500	2000	2500	3000	3500	2000
Fork lowered	mm	85	85	85	85	85	85	85	85	85
Outside fork width	mm	640	640	640	640	640	640	640	640	640
Fork length	mm	1150	1150	1150	1150	1150	1150	1150	1150	1150
Single fork dimensions (CxEx)	mm	150 X 60	150 X 60	150 X 60	150 X 60	150 X 60	150 X 60	150 X 60	150 X 60	150 X 60
Outside width of fixed leg	mm	590	590	590	590	590	590	590	590	590
Single fixed leg dimensions	mm	100 X 50	100 X 50	100 X 50	100 X 50	100 X 50	100 X 50	100 X 50	100 X 50	100 X 50
Rated load capacity at the highest point	mm	800	700	600	500	1000	900	800	700	1200
Vehicle static height from the highest point	mm	2580	3080	3580	4080	2580	3080	3580	4080	2580
Overall length	mm	1800	1800	1800	1800	1800	1800	1800	1800	1800
Overall width	mm	800	800	800	800	800	800	800	800	800
Overall height	mm	1580	1830	2080	2330	1580	1830	2080	2330	1580
Small front wheel dimensions	mm	φ74 X 70	φ74 X 70	φ74 X 70	φ74 X 70	φ74 X 70	φ74 X 70	φ74 X 70	φ74 X 70	φ74 X 70
Big rear wheel dimensions	mm	φ180 X 50	φ180 X 50	φ180 X 50	φ180 X 50	φ180 X 50	φ180 X 50	φ180 X 50	φ180 X 50	φ180 X 50
Power unit	V/Kw	12/1.6	12/1.6	12/1.6	12/1.6	12/1.6	12/1.6	12/1.6	12/1.6	12/1.6
Charger	V/A	12/15	12/15	12/15	12/15	12/15	12/15	12/15	12/15	12/15
Battery	V/Ah	12/120	12/120	12/120	12/120	12/120	12/120	12/120	12/120	12/120
Service weight	kg	420	440	460	500	430	450	470	510	440